


N Male Clamp Connector For RG58 Cable

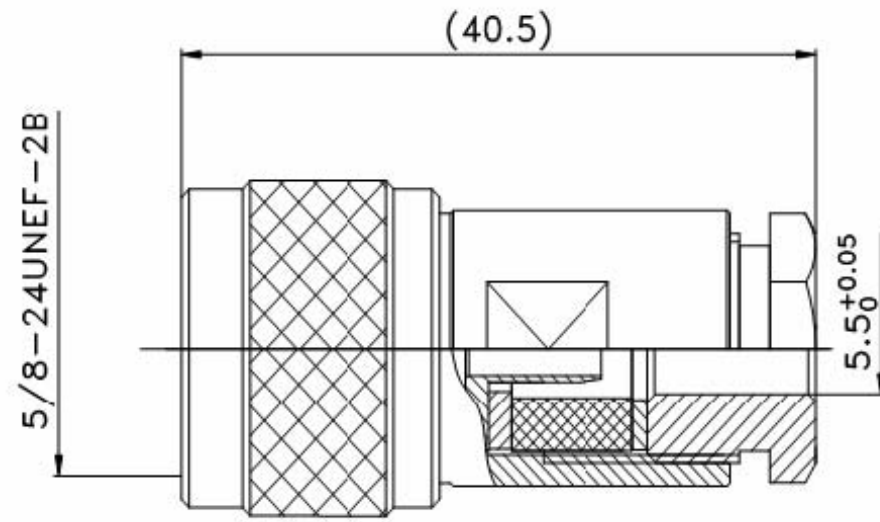

Interface

According to

IEC 60169-16

Electrical

Characteristic Impedance

50 ohm

Frequency Range

DC-11GHz

VSWR

≤1.20@DC-3000MHz

Dielectric Withstanding Voltage

≥2500V RMS, 50Hz, at sea level

Dielectric Resistance

≥5000MΩ

Contact Resistance

Center Contact ≤1.0mΩ

Outer Contact ≤0.25mΩ

Mechanical

Durability

Mating cycles ≥500

Material and plating

	Material	Plating
Body	Brass	Ni
Insulator	PTFE	—
Center conductor	Phosphor bronze	Au
Coupling Nut	Brass	Ni
Gasket	Silicone Rubber	—
Washer	Brass	Ni

Environmental

Temperature Range

-40°C ~ +85°C

RoHs Compliant