


Dimensions:

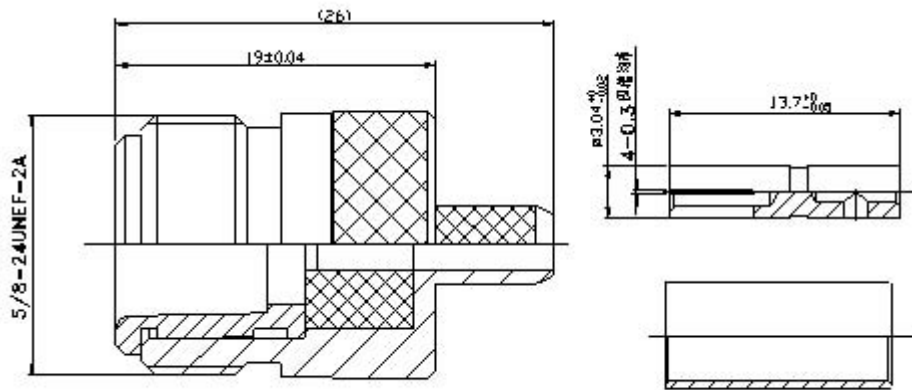

Interface

According to

Electrical

Characteristic Impedance

Frequency Range

VSWR

Dielectric Withstanding Voltage

Dielectric Resistance

Contact Resistance

IEC 60169-16

50 ohm

DC-11GHz

≤1.20@DC-3000MHz

≥2500V RMS,50Hz,at sea level

≥5000MΩ

Center Contact ≤1.0mΩ

Outer Contact ≤0.25mΩ

Mechanical

Durability

Material and plating

Mating cycles

≥500

Body

Insulator

Center conductor

Coupling Nut

Ferule

Material

Brass

PTFE

Phosphor bronze

Brass

Annealed Copper

Plating

Ni

—

Au

Ni

Ni

Environmental

Temperature Range

RoHs Compliant

-40°C ~ +85°C