


## N Female 25.4mm Panel Connector For Receptacle

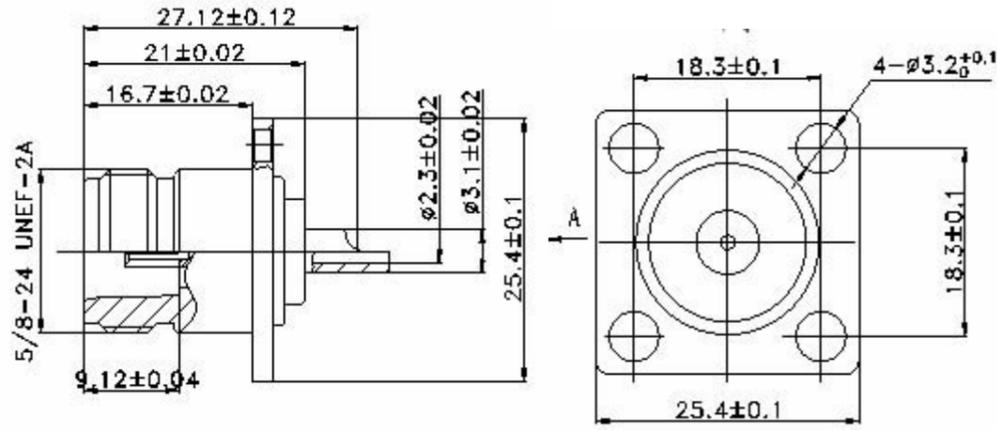

Interface  
According to

IEC 60169-16

Electrical  
Characteristic Impedance  
Frequency Range  
VSWR  
Dielectric Withstanding Voltage  
Dielectric Resistance  
Contact Resistance

50 ohm  
DC-11GHz  
≤1.10 @DC-3000MHz  
≥2500V RMS,50Hz,at sea level  
≥5000MΩ  
Center Contact ≤1.0mΩ  
Outer Contact ≤0.25mΩ

Mechanical  
Durability

Mating cycles ≥500

Material and plating

	Material	Plating
Body	Brass	Ni
Insulator	PTFE	—
Center conductor	Phosphor bronze	Au
Coupling Nut	Brass	Ni
Gasket	Silicone Rubber	—

Environmental  
Temperature Range  
Weatherproof Rate  
RoHs Compliant

-40℃~+85℃  
IP 67